Large Capacity Open Fryers

OFE 341 1-well electric **OFE 342** 2-well electric



OFE 342 2-well large capacity electric open fryer with Computron™ 8000 control

Henny Penny open fryers offer high-volume frying with programmable operation, oil management functions and fast, easy filtration.

The 340 series large capacity open fryers offer maximum frying surface area within an economical footprint. A larger, shallower fry vat produces more consistent frying results with items that float when cooking.

Henny Penny electric open fryers combine power and efficient heating to recover temperature very quickly. Fast recovery translates into higher throughput, lower energy costs and longer frying oil life.

Henny Penny open fryers have a built-in filtration system that filters and returns hot frying oil in minutes. No separate pumps and pans, no handling hot oil. Frequent filtering extends frying oil life, improves product quality and reduces oil costs.

The Computron™ 8000 control features automatic, programmable operation, as well as energy-saving, filtration and cook management functions.

The Computron™ 1000 control offers programmability in a simple, easy to use digital control panel with LED display.

Standard Features

- Heavy-duty stainless steel vats with 7-year warranty
- Larger, shallow vat offers large surface area that promotes more even cooking
- Specially designed "beach" accommodates oil displacement when lowering basket
- High-efficiency heating elements generate fast recovery and energy savings
- Cold zone below heating elements helps extend oil life
- High-limit temperature protection
- Built-in filtration with over-the-top oil return to flush remnants
- · Easy basket set and release
- Stainless steel construction for easy-cleaning and long life
- · 4 heavy-duty casters, 2 locking

- Computron[™] 8000 control (additional charge)
 - 12 programmable cook cycles
 - Melt mode
 - Idle mode
 - Clean-out mode
 - Water detection alert
 - Load compensation
 - Proportional control
 - Optional filter prompt and customizable filter tracking
 - 16-character digital display with multiple language settings
- Computron™ 1000 control
 - Programmable
 - LED Time/Temp display
 - Simple UP/DOWN arrows

Accessories shipped with unit

- Fry baskets—please select one
 - ☐ 1 full basket per well
- 2 half baskets per well
- 1 basket support for each vat
- Lift tool for basket support
- Lift tool for heating elements
- Filter screen and filter envelope

Options available separately


- ☐ 3 third-size baskets per well
- ☐ Direct Connect shortening disposal
- ☐ Fryer Shortening Shuttle®
- ☐ Filter rinse hose

☐ APPROVED	☐ APPROVED AS NOTED	☐ RESUBMIT
AUTHORIZED SIGNAT	TURE	DATE



Large Capacity Open Fryers

OFE 341 1-well electric **OFE 342** 2-well electric

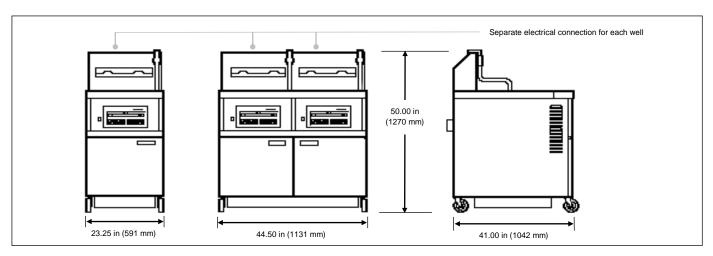

	OFE 341		OFE 342				
Dimensions							
Width	23.25 in	(591 mm)	44.50 in	(1131 mm)			
Depth	41.00 in	(1042 mm)	41.00 in	(1042 mm)			
Height	50.00 in	(1270 mm)	50.00 in	(1270 mm)			
Crated							
Length	46 in	(1169 mm)	51 in	(1296 mm)			
Depth	30 in	(762 mm)	46 in	(1169 mm)			
Height	66 in	(1676 mm)	66 in	(1676 mm)			
Volume	53 ft ³	(1.5 m^3)	90 ft ³	(2.5 m ³)			
Weight	348 lb	(158 kg)	554 lb	(251 kg)			
Heating immersed elements							
Output	22.0 kW total		44.0 kW total				

Oil capacity

80 lb or 38 L per vat

Electrical

Volts	Phase	Hertz	kW per well	Amps per well	Wire*
208	3	60	22.0	62.0	3+G
240	3	60	22.0	53.0	3+G
380-415	3	50	22.0	32.5	3NG
480	3	60	22.0	27.0	3+G

Laboratory certifications







Required clearances

Sides N/A Back N/A

Front 30 in (762 mm) remove filter pan

Bidding Specifications

Provide Henny Penny model OFE 341 or 342 large capacity electric open fryer, 80 lb or 38 L oil capacity per vat, and built-in filtration system.

Unit shall incorporate:

- Computron[™] 1000 simple digital control OR Computron[™] 8000 control system (additional charge) with programmable or manual operation, LED digital display, idle and melt modes, load compensation, filtration tracking and 7-day history
- Fry vats of heavy duty stainless steel with 7-year warranty
- Shallow vat design with larger surface area and beach to compensate for load displacement
- 4 heavy-duty casters, 2 locking

*Separate electrical connection required for each well. Power cord and plug must be installed on site by a qualified electrician.

Continuing product improvement may subject specifications to change without notice.

24 Hour Technical Support: Henny Penny Technical Service 800 417.8405 technicalservices@hennypenny.com Henny Penny Corporation PO Box 60 Eaton OH 45320 USA

+1 937 456.8400 800 417.8417 +1 937 456.8434 Fax 800 417.8434 Fax

